

Bittiviare a molex company

IA-220-U2 U.2 FPGA Accelerator

Agilex on U.2 Form Factor with PCIe Gen4

FPGA-Based Computational Storage Processor for NVME Acceleration

BittWare's IA-220-U2 is a Computational Storage Processor conforming to the U.2 form factor. Ideal for NVMe acceleration, it features an Intel Agilex FPGA supporting PCIe Gen4 directly coupled to local DDR4 memory. This energy-efficient, flexible compute node is intended to be deployed within conventional U.2 NVMe storage arrays (approximately 1:8 ratio) allowing FPGA-accelerated instances of:


- Erasure Coding and Deduplication
- Compression, Encryption & Hashing

Gen4 x4 PCle

- String/Image Search and Database Sort/ Join/Filter
- Machine Learning Inference

The IA-220-U2 can be wholly programmed by customers developing in-house capabilities or delivered as a ready-to-run pre-configured solution featuring Eideticom's NoLoad® IP. The IA-220-U2 is front-serviceable in a 1U chassis and can be mixed in with storage units in the same server, allowing users to mix-and-match storage and acceleration.



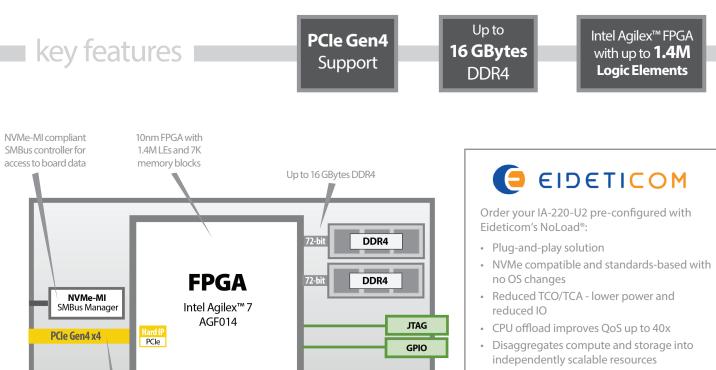

- CPU agnostic
- Reconfigurable accelerators, enabling scalable compute architectures

Learn more at www.eideticom.com

Additional Services

Take advantage of BittWare's range of design, integration, and support options



Customization Additional specification options or accessory boards to meet your exact needs.



Server Integration Available pre-integrated in our <u>TeraBox servers</u> in a range of configurations.



IP and Solutions Our portfolio of IP and solutions reduce risk for development and deployment.



Service and Support BittWare Developer Site provides online documentation and issue tracking.

Board Specifications

FPGA	 Intel Agilex 7 F-Series AGF014 Core speed grade -3: I/O speed grade -3 Contact BittWare for other Agilex FPGA options
On-board DDR4 SDRAM	 Two banks of DDR4 SDRAM x 72 bits Up to 8GB per bank (4GB default) Transfer Rate: 2400 MT/s
Host interface	 PCle Gen4 x4 U.2 Connector Compliant to SFF-8639
Datacenter deployment	 On-board NVMe-MI compliant SMBus controller (Spec. 1.0a) Field flash update via software or SMBus SMBus FPGA flash control: anti-bricking, fallback and multiboot SMBus access to unique board data and temperature sensor
Back panel features	User LEDs accessible
Development features	 JTAG connector for access to the FPGA, flash and debug tools GPIO connector
Power supply monitoring and reporting	 Voltage monitoring Temperature monitoring Fault condition reporting to FPGA

Cooling	 U.2 drive case optimized for cooling with passive heatsink
Electrical	 Hot swapping tolerant On-card power derived from U.2 supplies Power dissipation is application dependent Typical power consumption ~20W Card designed to deliver up to 25W power consumption
Environmental	 Operating temperature: 5°C to 35°C Cooling: forced air
Quality	Manufactured to IPC-A-610 Class 2 RoHS compliant
Form factor	U.2 compliant 2.5" Drive Form FactorHeight: 15mm

Development Tools

FPGA development	BittWare SDK including PCIe driver, libraries, and board monitoring utilities (Linux support only)
Application	Supported design flows - Quartus Prime Pro (HDL,
development	Verilog, VHDL, etc.)





To learn more, visit www.BittWare.com

Rev 2023.08.31 | August 2023

© BittWare 2023

Agilex is a trademark of Intel Corp. All other products are the trademarks or registered trademarks of their respective holders.